



Weatherproof and Waterproof Wall box MA1100

DESCRIPTION

The MA1100 surface wall box is designed to be used with the FW122 annunciator. The wall box is resistant to temperatures ranging from -40 to 49 degrees Celsius. In addition, it can be used with two ULC 20W -20W (24VCA/VCC) heating options that activate at 1°C and deactivate at 17°C.

ATTENTION


Products must be installed in accordance with the National Fire Alarm Code, NFPA 72, CAN / ULC-S524 and / or National Electrical Code, depending on the country of the installation. Check information on equipment used in the system from other manufacturers for instructions and restrictions. The detector should never be installed in the following places: where there is a lot of exhaust gas, kitchens, near fireplaces, boilers, etc. Smoke detectors should not be used with detector guards unless the suit has been evaluated and approved for this case.

NOTE

Do not paint this unit.

Any material extrapolated from this document or Maple Armor's instructions or other materials describing the product for promotional or advertising purposes, or for any other purpose, including the description of the application, the use, installation and testing of the product is the sole responsibility of the user. Maple Armor assumes no responsibility for the use. In no event shall Maple Armor's liability exceed the purchase price of the product.

INSTALLATION

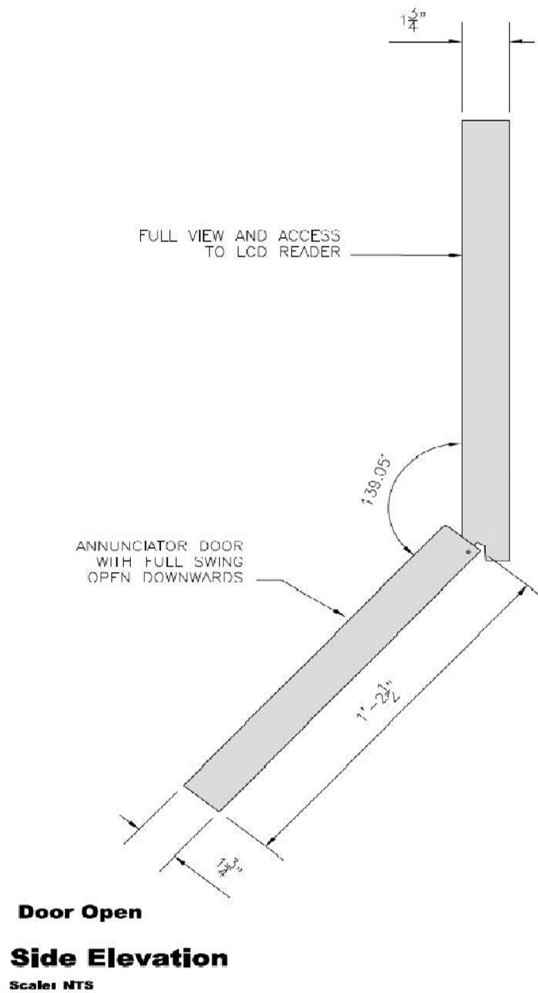

SPECIFICATIONS

Heating element power	24 VCA or 24VCC 20W, 0.83333A
Activation	1°C
Deactivation	17°C
Temperature of operation	- 40°C to 49°C (0°C to 49°C)

CATALOG NUMBER TO ORDER

Model	Description
MA1100	Weatherproof and Waterproof Wall Box