

### General Series Battery

FM series batteries are Maple Armor brand universal lead-acid batteries. Using high-quality lead calcium multi-element alloy plates, with high rate discharge capacity; High performance cast welded grid, with conductivity 30% higher than ordinary batteries; Internally, it adopts integrated casting and welding, reducing internal resistance by 20% and better adapting to high current discharge; Unique AGM technology enables higher energy density and stronger charging acceptance of batteries; Imported ABS raw materials and self-made shell, using self-developed automatic sealing technology, make the battery a complete whole, greatly improving sealing performance; Copper terminals (plug-in/vertical/downward rotation) not only meet the needs of high current charging and discharging, but also have flexible installation and more convenient maintenance. This series of batteries is manufactured using internationally advanced automated production lines, with high stability and consistency, and a longer service life. Design lifespan up to 10 years (25 °C)

### Application

- \* Emergency Power System
- \* Communication equipment
- \* Telecommunication systems
- \* Uninterruptible power supplies
- \* Electric toy car and wheelchairs, etc.
- \* Power tools
- \* Alarm system
- \* Marine equipment
- \* Medical equipment
- \* Fire and Security System

### General Features

- \* Heavy Duty Grid
- \* Mechanized assembly
- \* Non-spillable construction
- \* High Reliability and Stability
- \* Sealed and Maintenance-free
- \* Long Life and low self-discharge design

### Construction


- \* Positive ..... Lead dioxide
- \* Electrolyte ..... Sulfuric acid
- \* Separator ..... Fiber glass
- \* Negative ..... Lead
- \* Safety Valve ..... EPDR
- \* Terminal ..... Copper
- \* Container ..... ABS(UL94-HB) / Flame Retardant ABS (UL94-V0)




### Specification

Battery Model	Nominal Voltage		12V (6 cells per unit)	
	Rated capacity (20 Hour rate)		35AH	
Dimension	Length	Width	Height	Total Height
	196mm (7.72 inches)	130mm (5.12 inches)	155mm (6.10 inches)	170mm (6.69 inches)
Approx Weight	9.50kg(20.94lbs) ± 3%			
Internal Resistance	Full charged at 25°C(77°F):Approx 8.00mΩ			
Maximum Charge Current	10.5A			
Max.discharge current	396A (5Sec.)			
Short-circuit current	840A			
Operating Temperature Range	Nominal Operating Temperature	Discharge	Charge	Storage
	25°C(77°F)	-15°C~ 50°C (5°F~122°F)	-15°C~ 40°C (5°F~104°F)	-15°C~ 40°C (5°F~104°F)
Capacity @ 25°C (77°F)	20 hour rate(1.75A,10.5V)	10 hour rate(3.3A,10.5V)	5 hour rate(5.96A,10.5V)	1 hour rate(22.2A,9.6V)
	35.0Ah	33.0Ah	29.8Ah	22.2Ah
Capacity affected by Temp.(10HR)	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	102%	100%	85%	65%
Charge method	Float Charging Voltage		Equalization Charging Voltage	
	13.5 ~ 13.8 VDC/Unit at 25°C (77°F)		14.4~ 15.0 VDC/Unit at 25°C (77°F)	

### Outer dimension (mm)

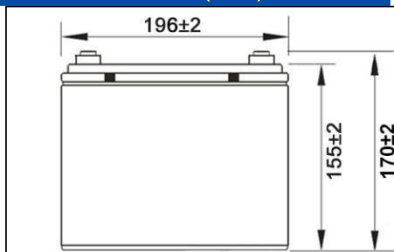


### Terminal Type

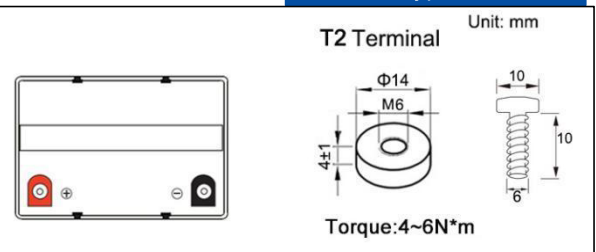


### Constant Current(Amp) and Constant Power(Watt) Discharge Table at 25°C(77°F)

F.V/Time		5min	10min	15min	20min	30min	1h	2h	3h	5h	8h	10h	20h
1.85V/cell	A	100	69.5	54.5	44.2	34.5	20.5	12.00	8.67	5.77	3.87	3.20	1.70
	W	189	133.0	104.6	85.0	67.5	40.2	23.71	17.22	11.47	7.80	6.50	3.50
1.80V/cell	A	107	73.5	57.0	46.5	35.6	20.9	12.24	8.81	5.87	3.93	3.25	1.72
	W	199	139.1	108.6	88.8	69.2	41.0	24.09	17.45	11.64	7.87	6.56	3.52
1.75V/cell	A	113	77.2	59.7	48.4	36.5	21.3	12.43	8.95	5.96	3.98	3.30	1.74
	W	209	144.9	112.8	91.5	70.5	41.7	24.35	17.67	11.80	7.94	6.60	3.54
1.70V/cell	A	119	80.4	62.3	50.0	37.2	21.6	12.60	9.07	6.04	4.03	3.33	1.75
	W	218	150.0	117.0	94.2	71.7	42.2	24.61	17.88	11.93	8.01	6.64	3.55
1.67V/cell	A	122	82.3	64.3	50.9	37.7	21.8	12.72	9.15	6.08	4.06	3.35	1.76
	W	223	152.1	120.0	95.6	72.5	42.6	24.81	18.00	12.00	8.05	6.66	3.56
1.60V/cell	A	130	86.0	67.0	52.8	38.5	22.2	12.92	9.25	6.15	4.11	3.38	1.78
	W	236	157.5	125.0	98.5	73.7	43.2	25.14	18.20	12.11	8.11	6.70	3.58


**Discharge characteristic Curve**

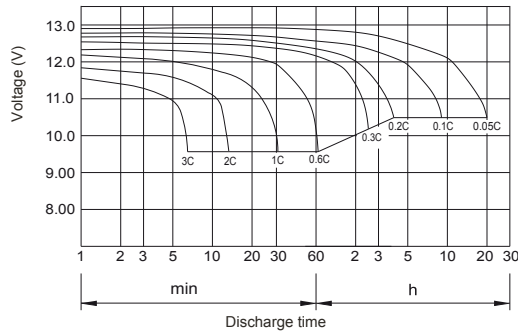


**Cycle service life in relation to depth of discharge**

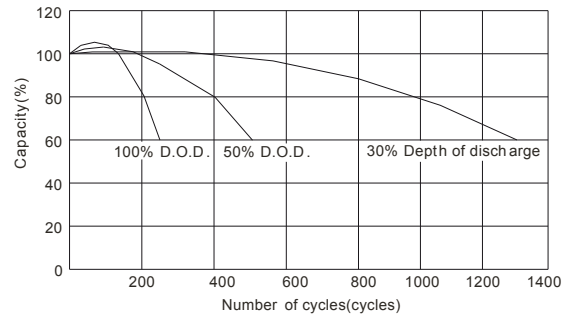


**Relationship between charging voltage and temperature**

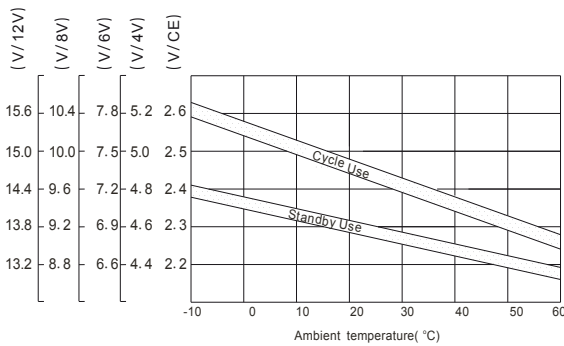


**Constant voltage charging characteristic (0.25CA, at 25°C)**

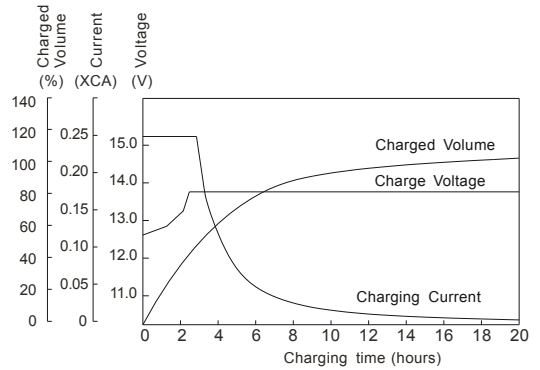


**Temperature effects on float life**

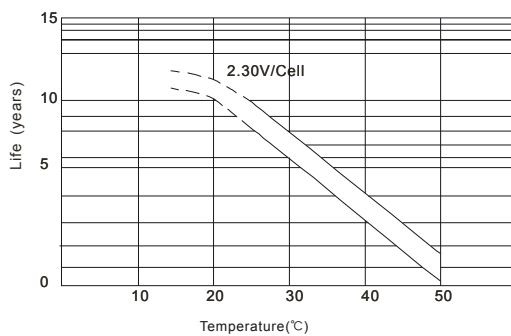

**Self-discharge characteristic**

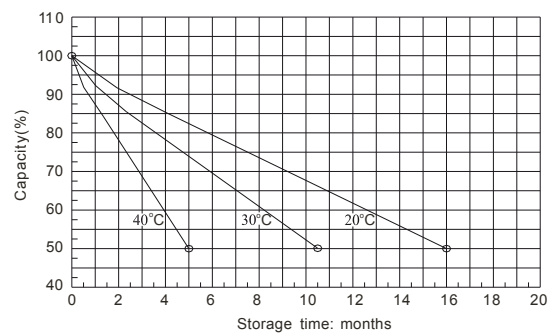

**Life characteristics of standby use**

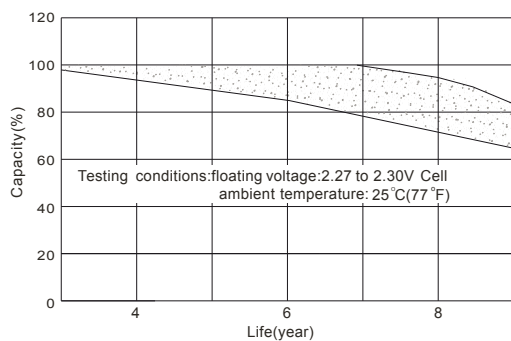

**Charge characteristic Curve for standby use**

