

Intercom

3G Wireless Building door phone

FW6308-CLA1

DESCRIPTION


The new wireless card access integrated system delivers performance and value in all configurations. From small apartment/condo to large commercial applications, this Intercom offers the most extensive list of features available.

1. Mature mobile communication technology.
2. Frequency Range: UMTS/HSDPA: Quad-band, 850/900/1900/2100MHz. GSM/GPRS/EDGE: Quad band, 850/900/1800/1900Mhz
3. Two working modes: 2G and 3G mode
4. Multiple landline and mobile phone numbers to each user room
5. Three administrator phone numbers
6. Signal insensitivity is better than -108dBm
7. Operating voltage: 12V-15V DC

Page 1 of 2

- 8. Operating current: <130mA (Standby)
- 9. Operating temperature: -10 °C ~ +50 °C
- 10. Production Dimension (L x W x H): 340 x 135 x 40 mm

WIRING DIAGRAM

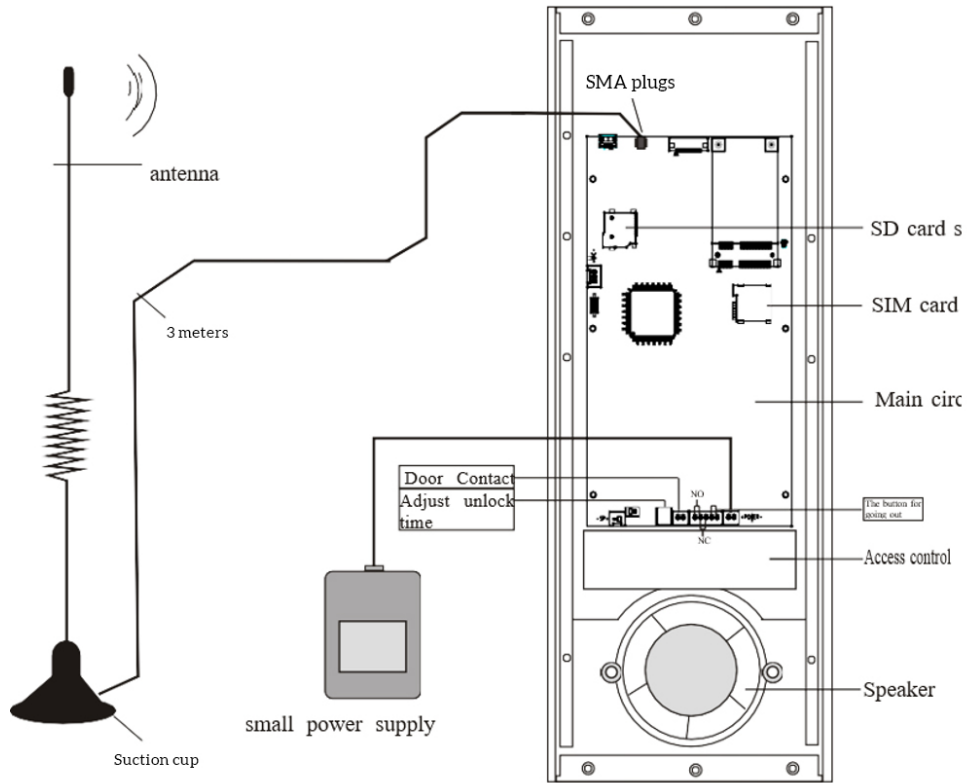

DIMENSION

