

10195/10196

LED REMOTE HEADS

DESCRIPTION

- Injection-Molded thermoplastic housing
- Super bright and long lasting LEDs
- UL 94-5VA flame rating, fire retardant
- Universal DC voltage 3.6-24VDC
- Universal Mounting: Wall/Ceiling Mounting
- Remote heads adjustable 2W / 4W
- Suitable for dry or damp locations
- Operating temperature: 0°C ~ 40°C/50°F ~ 104°F
- Insulation: II
- 1-Year Warranty
- Meets requirements of UL924
- ULc Certified to C22.2-N0141-10

Super bright and long lasting LEDs
(single / double head)


10195

10196

SINGLE LED HEAD



2
WATTS

DOUBLE LED HEADS

4
WATTS

KEY FEATURES

Product Code	10195	10196
Description	1 remote head - 2W	2 remote heads - 4W
Light Source	SMD 2835 (3pcs)	SMD 2835 (3pcs)
Input Voltage	DC 3.6V-24V DC3.6V:270-320mA DC12V:145-170mA DC24V:80-100mA	DC 3.6V-24V DC3.6V:550-620mA DC12V:290-330mA DC24V:160-200mA
Emergency Power	3.6V: 0.95-1.15W 12V: 1.75-2.1W 24V: 1.95-2.4W	3.6V: 1.8-2.2W 12V: 3.6-4.4W 24V: 3.6-4.4W
LED Heads	1*2W	2*2W
Luminance Flux	3.6V ≥ 70lm 12V ≥ 90lm 24V ≥ 90lm	3.6V ≥ 140lm 12V ≥ 180lm 24V ≥ 180lm
Battery	N/A	N/A
Suitable For	10197 10031 10032 10035	10197 10031 10032 10035
Max. Mounting Height	10.8ft (3.2m)	13.8ft (4.1m)
Instruction Sheet	VIEW	VIEW

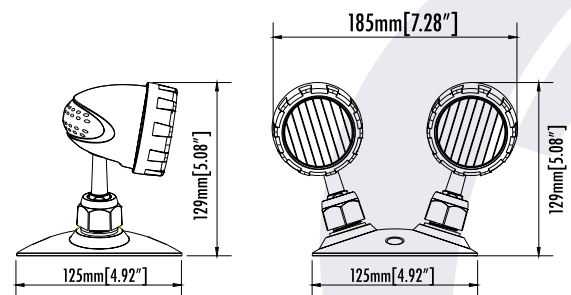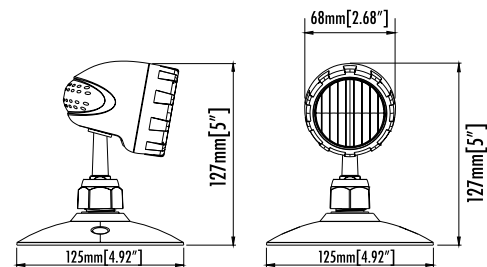

10029/10030

LED REMOTE HEADS

DESCRIPTION

- Injection-Molded thermoplastic housing
- Super bright and long lasting LEDs
- UL 94-5VA flame rating, fire retardant
- Universal DC Voltage 5-24VDC
- Universal Mounting: Wall/Ceiling Mounting
- Remote heads adjustable 5W / 10W
- Suitable for dry or damp locations
- Operating Temperature: 0°C ~ 40°C/50°F ~ 104°F
- Insulation: II
- 1-Year Warranty
- Meets requirements of UL924
- ULc Certified to C22.2-NO141-10

Super bright and long lasting LEDs
(single / double head)


10029

10030

SINGLE LED HEAD

5
WATTS

DOUBLE LED HEADS

10
WATTS

KEY FEATURES

Product Code	10029	10030
Description	1 remote head - 5W	2 remote heads - 10W
Light Source	SMD 2835 (3pcs)	SMD 2835 (3pcs)
Input Voltage	DC 5V-24V DC6V: 0.75-0.9A DC12V: 0.375-0.45A DC24V: 0.19-0.23A	DC 5V-24V DC3.6V: 1.5-1.8A DC12V: 0.75-0.9A DC24V: 0.38-0.46A
Emergency Power	3.6V: 0.95-1.15W 12V: 1.75-2.1W 24V: 1.95-2.4W	3.6V: 1.8-2.2W 12V: 3.6-4.4W 24V: 3.6-4.4W
LED Heads	1*5W	2*5W
Luminance Flux	≥350lm	≥700lm
Battery	N/A	N/A
Suitable For	10031 10032 10035	10031 10032 10035
Max. Mounting Height	16.08 ft (4.9m)	13.8 ft (4.1m)
Instruction Sheet	VIEW	VIEW

