

10351

SINGLE OR DOUBLE FACE

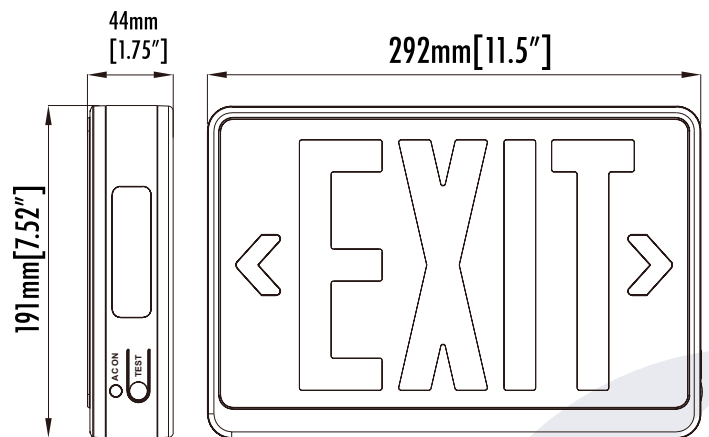
DESCRIPTION

- Injection-Molded thermoplastic housing
- UL 94 V-0 flame rating, fire retardant
- Super bright and long lasting LEDs
- Universal AC input voltage 120 / 277VAC
- Test switch and AC-ON indicator
- Single or double face
- Universal Mounting: Wall/Ceiling / Side Mounting
- 90 minutes battery backup time
- Suitable for damp locations
- Overcharge and over-discharge protection
- Operating temperature: 0°C ~ 40°C/50°F ~ 104°F
- 1-Year Warranty
- ULc Certified to C22.2-N0141-10


10351

KEY FEATURES

Product Code	10351
Description	Emergency Light
Light Source	RED DIP5mm (12pcs)
Input Voltage	AC120/277V, 60Hz, 200mA
Input Power	3.8W
Emergency Power	0.36W
LED Heads	N/A
Emergency Duration	90 Minutes
Battery	Ni-Cd 3.6V, 900mAh
Recharge Times	24 Hrs
Remote Capable	N/A
Max. Mounting Height	N/A
Instruction Sheet	VIEW


BACKUP TIME
90

MINUTES APPROX.

RECHARGE TIME
24

HOURS