

LED Remote Heads

UNIVERSAL VOLTAGE

10195 / 10196 / 10029

DESCRIPTION

- Injection-Molded thermoplastic housing
- Super bright&Long Lasting LEDs
- **UL 94-5VA** flame rating, fire retardant
- Universal DC voltage **3.6-24VDC / 5-24VDC**
- Universal Mounting: Wall/Ceiling Mounting
- Remote heads adjustable 2W / 4W / 5W
- Suitable for **Dry and Damp Locations**
- Operating temperature: 0 °C -40 °C/ 32 °F ~104 °F
- **Insulation:II**
- 1 year warranty
- Meets requirements of UL924
- ULc certified to C22.2-NO141-10



REMOTE HEADS

2 / 4 / 5

Watts



PRODUCT SIZE



10195 / 10029



10196

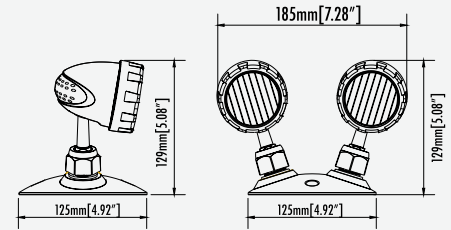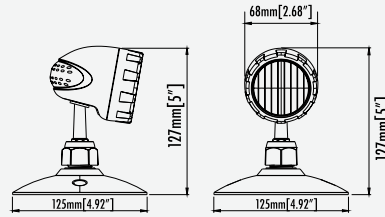

KEY FEATURES

Model Code	RO-Z1101UA	RO-Z1102UB	RO-Z1301UC
Product Code	10195	10196	10029
Description	Single remote head 2W	Double remote heads 4W	Single remote head 5W
Light Source	SMD 2835(3pcs)	SMD 2835(3pcs)	SMD 2835(3pcs)
Input Voltage	DC 3.6V-24V DC3.6V:270-320mA DC12V:145-170mA DC24V:80-100mA	DC 3.6V-24V DC3.6V:550-620mA DC12V:290-330mA DC24V:160-200mA	DC 5V-24V DC6V: 0.75-0.9A DC12V: 0.375-0.45A DC24V: 0.19-0.23A
Emergency Power	3.6V: 0.95-1.15W 12V: 1.75-2.1W 24V: 1.95-2.4W	3.6V: 1.8-2.2W 12V: 3.6-4.4W 24V: 3.6-4.4W	5W
LED Heads	1*2W	2 * 2W	1 * 5W
Luminance Flux	3.6V ≥ 70lm 12V ≥ 90lm 24V ≥ 90lm	3.6V ≥ 140lm 12V ≥ 180lm 24V ≥ 180lm	≥350lm
Battery	/	/	/
Suitable For	BEST-RC RO-Z2136U-N RO-Z2172U-N RO-Z2250U-N	BEST-RC RO-Z2136U-N RO-Z2172U-N RO-Z2250U-N	RO-Z2136U-N RO-Z2172U-N RO-Z2250U-N
Max. mounting height	10.8ft (3.2m)	13.8ft (4.1m)	16.08ft(4.9m)
Instruction Sheet	VIEW	VIEW	VIEW